



KIM QUANG ELECTRIC DISTRIBUTOR

www.kimquang.com.vn
www.kimquang.vn

Hotline: 0931 455 668

01.10.2023

BẢNG GIÁ

BREAKER & SWITCHGEAR SYSTEM



<http://circuit-breaker.seec.com.tw>



GET IT ON
Google Play

Download on the
App Store



SHIHLINToolKit

Notification Letter

Re : Distributors

Subject : Instructions for discontinued production of some MCCB models

Description :

1. Thanks to distributors for the long-term support to Shihlin MCCB products. In order to improve product competitiveness and accord with the demands of the market, Shihlin has launched new MCCB products in Jan 2021.
2. List of discontinued & switch models as shown below:

| Frame size | Discontinued | Switch model | Width |
|------------|--------------|--------------|---------|
| 100 | BM100-HN | BM100-STD | 90→75 |
| 100 | BM100-HBN | BM100-LTD | 105→75 |
| 125 | BM125-HN | BM125-LTD | 90→75 |
| 100 | BM100-H | BM125-HTA | 105→90 |
| 100 | BM100-HC | BM125-RTA | 105→90 |
| 160 | BM160-HB | BM160-HTA | same |
| 160 | BM160-HC | BM160-RTA | same |
| 250 | BM250-HB | BM250-HTA | same |
| 250 | BM250-HC | BM250-RTA | same |
| 630 | BM630-CN | BM630s-STA | 210→140 |
| 630 | BM630-SN | BM630s-LTA | 210→140 |
| 630 | BM630-HN | BM630s-HTA | 210→140 |
| 630 | BM630-RN | BM630s-RTA | 210→140 |
| 630 | BMA630-HTD | BMA630s-HTD | 210→140 |
| 630 | BMA630-RTD | BMA630s-RTD | 210→140 |
| 1000 | BM1000-HS | BMA1000-RED | same |
| 1200 | BM1200-HS | BMA1250-RED | same |
| 1600 | BM1600-HS | BMA1600-RED | same |

3. New models feature with flip-top cover for accessories installation, and CB reports.
4. New/old model switching date: 2021/10/1. If you have any concern or question during switching models between projects and stocks, please kindly contact Shihlin distributor to facilitate new models substitution.

SHIHLIN ELECTRIC



Distributor

Breaker & Switchgear
Overseas Marketing Dept.

Date of issue :

Sep., 24th , 2021


**KEMA
KEUR**

| Type | | BMA160 | | BMA250 | | BMA400 | |
|-----------------------------|------|---|-------|------------------|-------|------------------|-------|
| Frame Size | | 160AF | | 250AF | | 400AF | |
| Model | | STA | LTA | STA | LTA | HTA | RTA |
| Pole | | 3P / 4P | | 3P / 4P | | 3P / 4P | |
| Frequency (Hz) | | 50 / 60 | | 50 / 60 | | 50 / 60 | |
| Rated Current, In | | 40.50.60.63.70.75.80.100. 125.140.150.160A | | 175.200.225.250A | | 250.300.350.400A | |
| Breaking Capacity, Icu (AC) | 690V | 8 kA | 8 kA | 10 kA | 10 kA | 10 kA | 15 kA |
| | 415V | 25 kA | 36 kA | 25 kA | 36 kA | 50 kA | 70 kA |
| | 380V | 25 kA | 36 kA | 25 kA | 36 kA | 50 kA | 70 kA |
| Ics (%Icu) | | 100 | | 100 | | 100 | |
| Dimension W x H x D (mm) | 3P | 105 x 165 x 68 | | 105 x 165 x 68 | | 140 x 257 x 103 | |
| | 4P | 140 x 165 x 68 | | 140 x 165 x 68 | | 185 x 257 x 103 | |
| Weight (kg) | 3P | 1.5 | | 1.5 | | 5.7 | |
| | 4P | 1.9 | | 1.9 | | 7.5 | |

| Type | | BMA630 | | BMA800 | |
|-----------------------------|------|-----------------|-------|-----------------|-------|
| Frame Size | | 630AF | | 800AF | |
| Model | | HED | RED | HED | RED |
| Pole | | 3P / 4P | | 3P / 4P | |
| Frequency (Hz) | | 50 / 60 | | 50 / 60 | |
| Rated Current, In | | 630A | | 800A | |
| Breaking Capacity, Icu (AC) | 690V | 10 kA | 15 kA | 10 kA | 15 kA |
| | 415V | 50 kA | 70 kA | 50 kA | 70 kA |
| | 380V | 50 kA | 70 kA | 50 kA | 70 kA |
| Ics (%Icu) | | 100 | | 100 | |
| Dimension W x H x D (mm) | 3P | 210 x 275 x 103 | | 210 x 275 x 103 | |
| | 4P | 280 x 257 x 103 | | 280 x 257 x 103 | |
| Weight (kg) | 3P | 11.5 | | 12 | |
| | 4P | 15.3 | | 15.8 | |



Model Launched!

| Type | | BM100 | | BM125 | | | BM160 | | BM250 | | |
|----------------------------------|------|---|-------|--|-----------------------------------|-----------------------------------|---|----------------|---|----------------|----------------|
| Frame Size | | 100AF | | 125AF | | | 160AF | | 250AF | | |
| Model | | STD | LTD | LTD | HTA | RTA | HTA | RTA | HTA | RTA | |
| Number of poles | | 2P / 3P / 4P | | 2P / 3P / 4P | | | 3P / 4P | | 3P / 4P | | |
| Frequency (Hz) | | 50 / 60 | | 50 / 60 | | | 50 / 60 | | 50 / 60 | | |
| Rated Current, In | | 10,15,16,20,25,30,32,40,50,60,63,75,80,100A | | 10,15,16,20,25,30,32,40,50,60,63,70,75,80,100,125A | | | 40,50,60,63,70,75,80,100,125,140,150,160A | | 40,50,60,63,70,75,80,100,125,140,150,160,175,200,225,250A | | |
| Rated insulation voltage Ui (AC) | | 800V | | 800V | | | 800V | | 800V | | |
| Uimp(kV) | | 8kV | | 8kV | | | 8kV | | 8kV | | |
| Breaking Capacity, Icu (AC) | 690V | 5 kA | 5 kA | 5 kA | 10 kA | 10 kA | 10 kA | 10 kA | 10 kA | 10 kA | |
| | 415V | 25 kA | 36 kA | 36 kA | 50 kA | 70 kA | 50 kA | 70 kA | 50 kA | 70 kA | |
| | 380V | 30 kA | 36 kA | 36 kA | 50 kA | 70 kA | 50 kA | 70 kA | 50 kA | 70 kA | |
| Ics (%Icu) | | 50 | 70 | 70 | 50 | 50 | 50 | 50 | 50 | 50 | |
| Dimension W x H x D (mm) | 2P | 50 x 130 x 68 | | 50 x 130 x 68 | | 90 x 155 x 68 | | 90 x 155 x 68 | | - | - |
| | 3P | 75 x 130 x 68 | | 75 x 130 x 68 | | 90 x 155 x 68 | | 90 x 155 x 68 | | 105 x 165 x 68 | 105 x 165 x 68 |
| | 4P | 100 x 130 x 68 | | 100 x 130 x 68 | | 120 x 155 x 68 | | 120 x 155 x 68 | | 140 x 165 x 68 | 140 x 165 x 68 |
| Trip Unit | | Thermal magnetic | | Thermal magnetic | Adjustable Thermal Fixed magnetic | Adjustable Thermal Fixed magnetic | Adjustable Thermal Fixed magnetic | | Adjustable Thermal Fixed magnetic | | |

| Type | | BM630s | | | | BMA630s | | | | BMA1000 | BMA1250 | BMA1600 |
|----------------------------------|------|-----------------------------------|-------|-------|-------|-----------------------------------|-------|-------|-------|-----------------|-----------------|-----------------|
| Frame Size | | 630AF | | | | 630AF | | | | 1000AF | 1250AF | 1600AF |
| Model | | STA | LTA | HTA | RTA | STA | LTA | HTA | RTA | RED | RED | RED |
| Number of poles | | 3P / 4P | | | | 3P / 4P | | | | 3P / 4P | 3P / 4P | 3P / 4P |
| Frequency (Hz) | | 50 / 60 | | | | 50 / 60 | | | | 50 / 60 | 50 / 60 | 50 / 60 |
| Rated Current, In | | 400,500,600,630A | | | | 400,500,600,630A | | | | 1000A | 1250A | 1600A |
| Rated insulation voltage Ui (AC) | | 1000V | | | | 1000V | | | | 1000V | 1000V | 1000V |
| Uimp(kV) | | 8kV | | | | 8kV | | | | 8kV | 8kV | 8kV |
| Breaking Capacity, Icu (AC) | 690V | 10 kA | 10 kA | 10 kA | 15 kA | 10 kA | 10 kA | 10 kA | 15 kA | 45 kA | 45 kA | 45 kA |
| | 415V | 25 kA | 36 kA | 50 kA | 70 kA | 25 kA | 36 kA | 50 kA | 70 kA | 70 kA | 70 kA | 70 kA |
| | 380V | 25 kA | 36 kA | 50 kA | 70 kA | 25 kA | 36 kA | 50 kA | 70 kA | 70 kA | 70 kA | 70 kA |
| Ics (%Icu) | | 50 | | | | 100 | | | | 100 | 100 | 100 |
| Dimension W x H x D (mm) | 3P | 140 x 257 x 103 | | | | 140 x 257 x 103 | | | | 210 x 327 x 141 | 210 x 327 x 141 | 210 x 327 x 141 |
| | 4P | 185 x 257 x 103 | | | | 185 x 257 x 103 | | | | 280 x 327 x 141 | 280 x 327 x 141 | 280 x 327 x 141 |
| Trip Unit | | Adjustable Thermal Fixed magnetic | | | | Adjustable Thermal Fixed magnetic | | | | Electronic | Electronic | Electronic |

| MCCB (Aptomat) 2P Tiêu chuẩn IEC60947-2 | | | | |
|---|----|---------------------------------|-----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BM 30-CN | 2P | 3.5.10.15.20.30A | 1.5 | 505,000 |
| BM 50-CN | 2P | 10.15.20.30.40.50A | 2.5 | 636,000 |
| BM 100-MN | 2P | 10.15.20.30.40.50A | 10 | 877,000 |
| | | 60.75.100A | | 922,000 |
| BM 100-SN | 2P | 10.15.20.30.40.50.60.75.100A | 15 | 983,000 |
| BM 250-SN | 2P | 125.150.175.200.225.250A (Adj.) | 30 | 1,858,000 |
| BM 400-CN | 2P | 250.300.350.400A | 25 | 4,646,000 |

| MCCB (Aptomat) 3P Tiêu chuẩn IEC60947-2 | | | | |
|---|----|--|------------|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BM 30-CN | 3P | 3.5.10.15.20.30A | 1.5 | 687,000 |
| BM 50-CN | 3P | 10.15.20.30.40.50A | 2.5 | 707,000 |
| BM 100-MN | 3P | 10.15.20.30.40.50A | 10 | 881,000 |
| | | 60.75.100 | | 1,111,000 |
| BM 100-SN | 3P | 10.15.20.30.40.50A | 15 | 904,000 |
| | | 60.75.100 | | 1,139,000 |
| BM 100-STD | 3P | 15.16.20.25.30.32.40.50.60.63.75.80.100A | 30 | 1,683,000 |
| BM 100-LTD | 3P | 10.15.16.20.25.30.32.40.50.60.63.70.75.80.100A | 36 | 2,379,000 |
| BM 125-SN | 3P | 10.15.20.30.40.50.60.75.100.125A | 22 | 1,340,000 |
| BM 125-LTD | 3P | 15.16.20.25.30.32.40.50.60.63.75.80.100.125A | 36 | 2,379,000 |
| BM 125-HTA | 3P | 10.15.16.20.25.30.32.40.50 | 50 | 3,490,000 |
| BM 125-RTA | 3P | 60.63.70.75.80.100.125A (Adj.) | 70 | 5,768,000 |
| BM 160-HTA | 3P | 40.50.60.63.70.75.80.100 | 50 | 4,326,000 |
| BM 160-RTA | 3P | 125.140.150.160A (Adj.) | 70 | 4,944,000 |
| BM 250-CN | 3P | 125.150.175.200.225.250A (Adj.) | 22 | 2,225,000 |
| BM 250-SN | 3P | | 30 | 2,369,000 |
| BM 250-HN | 3P | 36 | 2,754,000 | |
| BM 250-HTA | 3P | 50 | 5,048,000 | |
| BM 250-RTA | 3P | 70 | 5,268,000 | |
| BM 400-CN (Không thanh đồng) | 3P | 250.300.350.400A | 25 | 4,726,000 |
| BM 400-SN (Không thanh đồng) | 3P | | 35 | 5,162,000 |
| BM 400-HN (Không thanh đồng) | 3P | 50 | 5,518,000 | |
| BM 630s-STA (Không thanh đồng) | 3P | 400.500.600.630A (Adj.) | 25 | 9,566,000 |
| BM 630s-LTA (Không thanh đồng) | 3P | | 36 | 9,778,000 |
| BM 630s-HTA (Không thanh đồng) | 3P | 50 | 13,438,000 | |
| BM 630s-RTA (Không thanh đồng) | 3P | 70 | 16,828,000 | |
| BM 800-CN (Không thanh đồng) | 3P | 700.800A | 35 | 9,836,000 |
| BM 800-SN (Không thanh đồng) | 3P | | 50 | 12,838,000 |
| BM 400-CN | 3P | 250.300.350.400A | 25 | 5,520,000 |
| BM 400-SN | 3P | | 35 | 5,956,000 |
| BM 400-HN | 3P | 50 | 6,312,000 | |
| BM 630s-STA | 3P | 400.500.600.630A (Adj.) | 25 | 10,360,000 |
| BM 630s-LTA | 3P | | 36 | 10,572,000 |
| BM 630s-HTA | 3P | 50 | 14,232,000 | |
| BM 630s-RTA | 3P | 70 | 17,622,000 | |
| BM 800-CN | 3P | 700.800A | 35 | 12,368,000 |
| BM 800-SN | 3P | | 50 | 15,370,000 |
| BM 1000-HS | 3P | 1000A | 100 | 32,005,000 |
| BM 1200-HS | 3P | 1200A | 100 | 36,469,000 |
| BM 1600-HS | 3P | 1400.1600A | 100 | 49,247,000 |

| EMCCB (Aptomat) 3P IEC60947-2 Chính dòng điện từ 0.4~1*In | | | | |
|---|----|-------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BM 400-HE | 3P | 400A | 50 | 8,248,000 |
| BM 630-RE | 3P | 630A | 70 | 18,695,000 |
| BM 800-HE | 3P | 800A | 70 | 20,167,000 |
| BM 1000-HE | 3P | 1000A | 70 | 43,621,000 |
| BM 1250-HE | 3P | 1250A | 85 | 46,113,000 |
| BMA 1000-RED | 3P | 1000A | 70 | 29,968,000 |
| BMA 1250-RED | 3P | 1250A | 70 | 34,149,000 |
| BMA 1600-RED | 3P | 1600A | 70 | 46,113,000 |

| MCCB (Aptomat) 4P Tiêu chuẩn IEC60947-2 | | | | |
|---|----|--|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BM 100-SN | 4P | 10.15.20.30.40.50A | 15 | 1,197,000 |
| | | 60.75.100 | | 1,442,000 |
| BM 100-STD | 4P | 10.15.16.20.25.30.32.40.50.60.63.70.75.80.100A | 30 | 1,879,000 |
| | | | | |
| BM 250-SN | 4P | 125.150.175.200.225.250A | 30 | 2,737,000 |
| BM 250-HN | 4P | (Adj.) | 36 | 4,120,000 |
| BM 400-SN | 4P | 250.300.350.400A | 35 | 7,622,000 |
| BM 400-HN | 4P | | 50 | 8,652,000 |
| BM 630s-LTA | 4P | 400.500.600.630A | 36 | 15,122,000 |
| BM 630s-HTA | 4P | | 50 | 15,823,000 |
| BM 800-SN | 4P | 700.800A | 50 | 19,467,000 |
| BM 800-HN | 4P | | 70 | 24,926,000 |

| CB Chống giật Tiêu chuẩn IEC60947-2 Chính dòng 30 - 100 - 500mA 0.1s | | | | |
|--|----|---------------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BL 100-SN | 3P | 15.20.30.40.50A | 15 | 2,094,000 |
| | | 60.75.100A | | 2,219,000 |
| BL 160-SN | 3P | 125.140.160A | 30 | 4,337,000 |
| BL 250-SN | 3P | 175.200.225.250A | 30 | 4,362,000 |
| BL 400-SN | 3P | 250.300.350.400A | 35 | 9,223,000 |
| BL 630-HN | 3P | 500.630A | 50 | 14,956,000 |
| BL 100-SN | 4P | 15.20.30.40.50.60.75.100A | 15 | 3,614,000 |
| BL 100-HN | 4P | | 30 | 4,113,000 |
| BL 160-SN | 4P | 125.140.160A | 30 | 6,942,000 |
| BL 250-SN | 4P | 175.200.225.250A | 30 | 7,104,000 |
| BL 400-SN | 4P | 250.300.350.400A | 35 | 14,457,000 |
| BL 630-HN | 4P | 500.630A | 50 | 20,938,000 |

| RELAY BẢO VỆ PHA - MẮT PHA | |
|----------------------------|---------------|
| Mã hàng | Đơn giá (VND) |
| SLPR-4S (3P 220~440V) | 1,246,000 |

| PHỤ KIỆN MCCB - BỘ KHỞI ĐỘNG ON/OFF MCCB | | |
|--|-----------------------|------------|
| Mã hàng | Đơn giá (VND) | |
| MT-100N | BM/BL 50-CN/100-MN.SN | 7,931,000 |
| MT-125N | BM125-SN | 8,271,000 |
| MT-250N | BM/BL 250-CN.SN.HN | 9,064,000 |
| MT-250E | BM/BL 100-H/250-HB | 9,291,000 |
| MT-400N | BM/BL 400 | 12,463,000 |
| MT-800N | BM/BL 630/800 | 13,936,000 |

| Mã hàng | Đơn giá (VND) | | |
|---|---------------|-----------|-----------|
| | SHT | UVT | AUX |
| BM 50-CN/100-MN.SN | 698,000 | 1,394,000 | 340,000 |
| BM 100-HN/125-SN.HN | 748,000 | 1,636,000 | 431,000 |
| BM 100-STD.LTD/125-HTA.RTA/160-HTA.RTA/250-CN.SN.HN.HTA.RTA | 985,000 | 1,847,000 | 521,000 |
| BM 400-CN.SN.HN/630s-STA.LTA.HTA.RTA | 1,042,000 | 1,915,000 | 770,000 |
| BM 800-CN.SN.HN | 1,496,000 | 2,311,000 | 952,000 |
| BM 1000~1600-HS | 2,593,000 | 4,872,000 | 1,926,000 |
| BMA 1000~1600-RED | 2,593,000 | 4,872,000 | 1,926,000 |

| Thanh đồng - MCCB | | |
|-------------------|---------------|-----------|
| Mã hàng | Đơn giá (VND) | |
| Thanh đồng 3P | BM400/BM630s | 794,000 |
| | BM800 | 2,532,000 |
| Thanh đồng 4P | BM400/BM630s | 1,318,000 |
| | BM800 | 3,204,000 |



Giá bán đã bao gồm thuế VAT 10%

MS / STARTER

KHỞI ĐỘNG TỪ - CONTACTOR

| Mã hàng | 3φ 380V AC3 | | | Tiếp điểm | Chọn rơ le nhiệt | Đơn giá (VND) |
|-----------|-------------|-----|-----|-----------|------------------|---------------|
| | KW | HP | A | | | |
| S-P 06 | 3 | 4 | 6 | 1a | TH-P09PP | 269,000 |
| S-P 09 | 4 | 5.5 | 9 | | | 296,000 |
| S-P 9 T | | | | 309,000 | | |
| S-P 11 | 5.5 | 7.5 | 12 | 1a | TH-P12(E) | 347,000 |
| S-P 12T | | | | 380,000 | | |
| S-P 16 | 7.5 | 10 | 18 | 1a1b | TH-P20V(E) | 506,000 |
| S-P 21 A | 11 | 15 | 21 | 2a2b | | 526,000 |
| S-P 30 T | 15 | 20 | 30 | | | 706,000 |
| S-P 32 T | 15 | 20 | 32 | 1a1b | TH-P20TAV(E) | 605,000 |
| S-P 35 T | 18.5 | 25 | 35 | 2a2b | | 756,000 |
| S-P 40 T | 22 | 30 | 40 | | | 1,238,000 |
| S-P 50 T | 30 | 40 | 52 | 2a2b | TH-P60V(E) | 1,513,000 |
| S-P 60 T | 37 | 50 | 65 | 1a1b | | 1,627,000 |
| S-P 80 T | 45 | 60 | 80 | | | 2,333,000 |
| S-P 100 E | 55 | 75 | 100 | 1a1b | TH-P120(E) | 2,468,000 |
| S-P 100 T | 60 | 80 | 105 | 2a2b | | 2,613,000 |
| S-P 125 T | 75 | 100 | 130 | | | 3,666,000 |
| S-P 150 T | 90 | 125 | 160 | 2a2b | TH-P120TAV(E) | 4,838,000 |
| S-P 220 T | 120 | 160 | 220 | 2a2b | | 6,397,000 |
| S-P 300 T | 160 | 220 | 300 | | | 10,842,000 |
| S-P 400 T | 220 | 300 | 400 | 2a2b | | 12,836,000 |
| S-P 630 T | 335 | 450 | 630 | | | 23,001,000 |
| S-P 800 T | 450 | 610 | 800 | 2a2b | TH-P600(E) | 26,928,000 |

RƠ LE NHIỆT (CÓ THANH ĐỒNG KẾT NỐI) - OVERLOAD

| Mã hàng | Dãy điều chỉnh nhiệt (A) | Đơn giá (VND) |
|---------------|---|---------------|
| TH-P09PP | 1.3(1~1.6); 2(1.6~2.4); 3.2(2.4~4); 5(4~6)A 0.25(0.19~0.31); 0.4(0.3~0.5); 0.6(0.45~0.75)A | 291,000 |
| TH-P12(E) | 0.9(0.7~1.1); 1.2(0.9~1.5); 1.7(1.3~2.1)A 2.1(1.6~2.6); 3.3(2.5~4.1); 4.4(3.4~5.4)A 6.5(5~8); 9(7~11); 11(9~13); 15(12~18)A | 274,000 |
| TH-P18 | 9(7~11); 11(9~13); 15(12~18); 21(17~24)A | 263,000 |
| TH-P20V(E) | 28(22~34); 33(28~38); 40A(32~48)A | 309,000 |
| TH-P20TAV(E) | 33(28~38); 40(32~48); 54(43~65)A | 337,000 |
| TH-P60V(E) | 67(54~80); 80(60~100)A | 444,000 |
| TH-P60TAV(E) | 67(54~80); 80(60~100)A | 513,000 |
| TH-P120(E) | 40(32~48); 54(43~65); 67(54~80); 80(60~100) | 870,000 |
| TH-P120TAV(E) | 105(80~130)A 130(100~160); 160(120~200)A | 1,290,000 |
| TH-P220T(E) | 200(150~250)A | 2,839,000 |
| TH-P400T(E) | 260(200~320); 350(260~400)A | 4,073,000 |

KHỞI ĐỘNG TỪ HỘP

| Mã hàng | 3P 220V | | 3P 380V | | Rơ le Nhiệt | Đơn giá (VND) |
|-------------|---------|-----|---------|-----|---------------|---------------|
| | KW | HP | KW | HP | | |
| MS-P 11 PB | 0.2 | 1/4 | 0.4 | 1/2 | 1.2(0.9~1.5)A | 752,000 |
| | 0.3 | 2/5 | 0.75 | 1 | 1.7(1.3~2.1)A | |
| | 0.4 | 1/2 | 1.1 | 1.5 | 2.1(1.6~2.6)A | |
| | 0.75 | 1 | 1.5 | 2 | 3.3(2.5~4.1)A | |
| | 1.1 | 1.5 | 2.2 | 3 | 4.4(3.4~5.4)A | |
| | 1.5 | 2 | 3 | 4 | 6.5(5~8)A | |
| | 2.2 | 3 | 3.7 | 5.5 | 9(7~11)A | |
| | 3 | 4 | 5.5 | 7.5 | 11(9~13)A | |
| MS-P 16 PB | 3.7 | 5 | 7.5 | 10 | 15(12~18)A | 894,000 |
| MS-P 21 PB | 5.5 | 7.5 | 12 | 15 | 21(17~24)A | 994,000 |
| MS-P 35 TPB | 7.5 | 10 | 15 | 20 | 28(22~34)A | 1,735,000 |
| MS-P 40 TPB | 11 | 15 | 22 | 30 | 40(32~48)A | 1,759,000 |

PHỤ KIỆN KHỞI ĐỘNG TỪ

| Coil: 24.48.110.220.380V | Đơn giá (VND) | Tiếp điểm phụ (S-P11~21A) | Đơn giá (VND) |
|--------------------------|---------------|---------------------------|---------------|
| S-P 11~21 | 141,000 | AP-11S | 89,000 |
| S-P 30/35/40 | 180,000 | APS-11S | 99,000 |
| S-P 50/60 | 213,000 | AP-22S | 172,000 |
| S-P 80 | 393,000 | | |
| S-P 100 | 539,000 | | |
| S-P 125/150 | 931,000 | Nút nhấn - Push Button | Đơn giá (VND) |
| S-P 220 | 1,010,000 | PB-2 | 89,000 |
| S-P 300/400 | 5,610,000 | PB-3 | 168,000 |

| Khóa liên động | Đơn giá (VND) |
|------------------------------|---------------|
| MPU-11 S-2XP 11,35,40,50,60T | 127,000 |
| MPU-21 S-2XP 12,16,21,25T | 139,000 |
| MPU-50 S-2XP 80T | 208,000 |
| MPU-125 S-2XP 125~220T | 381,000 |

| Capacitor Unit | Kvar/380V | Đơn giá (VND) | |
|----------------|-----------|---------------|---------|
| AP-40-A | S-P 11 | 12.5 | 475,000 |
| | S-P 16 | 16.7 | |
| | S-P 21A | 20 | |
| AP-40-B | S-P 40T | 25 | 531,000 |
| | S-P 50T | 33.3 | |
| | S-P 60T | 45 | |
| | S-P 80T | 60 | |

CONTACTOR RELAY

| Mã hàng | Tiếp điểm phụ | Đơn giá (VND) |
|---------|---|---------------|
| SR-P40 | 4NO / 3NO 1NC / 2NO 2NC | 374,000 |
| SR-P50 | 5NO / 4NO 1NC / 3NO 2NC / 2NO 3NC | 437,000 |
| SR-P80 | 8NO / 7NO 1NC / 6NO 2NC / 5NO 3NC / 4NO 4NC | 548,000 |

KHỞI ĐỘNG TỪ KÉP

| Chuyên dùng cho cửa cuốn (Chuyển động thuận, nghịch) | Đơn giá (VND) |
|--|---------------|
| RC-11C Coil : 220 or 380VAC | 1,085,000 |

MANUAL MOTOR STARTER = MCB + OVERLOAD (3P)

| Mã hàng | Current In (A) | HP 3φ 380V | Đơn giá (VND) |
|-------------|----------------|------------|---------------|
| MR-32S-0.16 | 0.1~0.16 | 1/30 | 610,000 |
| MR-32S-0.25 | 0.16~0.25 | 1/19 | |
| MR-32S-0.4 | 0.25~0.4 | 1/8 | |
| MR-32S-0.63 | 0.4~0.63 | 1/4 | |
| MR-32S-1 | 0.63~1 | 1/3 | |
| MR-32S-1.6 | 1~1.6 | 1/2 | |
| MR-32S-2.5 | 1.6~2.5 | 1 | |
| MR-32S-4 | 2.5~4 | 2 | |
| MR-32S-6.3 | 4~6.3 | 3 | 623,000 |
| MR-32S-10 | 6~10 | 4~5 | |
| MR-32S-14 | 9~14 | 5~7.5 | |
| MR-32S-18 | 13~18 | 10 | |
| MR-32S-23 | 17~23 | 15 | |
| MR-32S-25 | 20~25 | 15(16) | |
| MR-32S-32 | 24~32 | 20 | |



Capacitor Unit



| Capacitor Unit | Magnetic Contactor | Maximum operating power(kvar) | | |
|----------------|--------------------|-------------------------------|----------|----------|
| | | 220~240V | 400~440V | 660~690V |
| AP-40 A | S-P11 | 6.7 | 12.5 | 18 |
| | S-P16 | 8.5 | 16.7 | 24 |
| | S-P21 | 10 | 20 | 30 |
| AP-40 B | S-P40T | 15 | 25 | 36 |
| | S-P50T | 20 | 33.3 | 48 |
| | S-P60T | 25 | 45 | 58 |
| | S-P80T | 35 | 60 | 75 |

Manual Motor Starter

Side AX (MR-AN)



Front AX (MR-AE)



SHT (MR-AS)



AL (MR-AM)
(For Magnetic Trip)



MMS

UVT (MR-AU)





Special Discount

| RPC (MCB) IEC60898 / IEC60947-2 (6kA) | | | |
|---------------------------------------|----|----------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| RPC | 1P | 6-10-16-20-25-32-40A | 61,000 |
| | | 50-63A | 64,000 |
| RPC | 2P | 6-10-16-20-25-32-40A | 130,000 |
| | | 50-63A | 134,000 |
| RPC | 3P | 6-10-16-20-25-32-40A | 210,000 |
| | | 50-63A | 216,000 |
| RPC | 4P | 6-10-16-20-25-32-40A | 338,000 |
| | | 50-63A | 383,000 |

| RPC-H (MCB) IEC60898 / IEC60947-2 (10kA) | | | |
|--|----|----------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| RPC-H | 1P | 6-10-16-20-25-32-40A | 103,000 |
| | | 50-63A | 124,000 |
| RPC-H | 2P | 6-10-16-20-25-32-40A | 215,000 |
| | | 50-63A | 263,000 |
| RPC-H | 3P | 6-10-16-20-25-32-40A | 347,000 |
| | | 50-63A | 473,000 |
| RPC-H | 4P | 6-10-16-20-25-32-40A | 567,000 |
| | | 50-63A | 703,000 |

| RPL (RCBO) IEC61009-1 | | | |
|-----------------------|------|-------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| RPL | 1P+N | 6.10.16.20A | 320,000 |
| | | 25.32A | 340,000 |
| | | 40.50.63A | 590,000 |

| RPV (RCCB) IEC61008-1 | | | |
|-----------------------|------|-------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| RPV | 1P+N | 16.20.25.32.40A | 600,000 |
| | | 63A | 610,000 |
| RPV | 3P+N | 16.20.25.32.40A | 750,000 |
| | | 63A | 830,000 |

* Rated residual current: 10, 15, 30, 100, 300mA

| Product | MCB | | RCCB | RCBO |
|------------------------|-----------------------------------|------------------|------------------------------|-----------------------------------|
| | RPC | RPC-H | RPV | RPL |
| Protection | Overload, Instantaneous | | Leakage | Overload, Instantaneous, Leakage |
| Frame size | 63AF | | 63AF | 63AF |
| Rated current | 6, 10, 16, 20, 25, 32, 40, 50, 63 | | 16,20,25, 32, 40, 63 | 6, 10, 16, 20, 25, 32, 40, 50, 63 |
| Instantaneous curve | B,C,D Type, 8~12In | | - | C, D Type |
| Poles | 1, 2, 3, 4 Pole | | 1P+N, 3P+N | 1P+N |
| Rated Voltage | 1P: AC240/415V 2-4P: AC415V | | 1P+N: AC240V 3P+N: AC415V | 2P: 240V~ |
| Breaking Capacity | 6kA @240/415Vac | 10kA @240/415Vac | Inc=6kA, 10kA | 6kA |
| Rated residual current | Operation I Δ n | - | 10, 15, 30, 100, 300mA | 10, 15, 30, 100, 300mA |
| | Non-operation I Δ no | - | 0.5I Δ n | 0.5I Δ n |
| Standard | IEC60898-1, IEC60947-2 | | IEC61008-1 | IEC61009-1 |
| Ui | 500V | | 500V | 500V |
| Uimp | 6KV | | 4KV | 4KV |
| Trip Unit | Thermal magnetic | | Electro-magnetic | Electronic |
| Mechanical life | 20000 | | 10000 | 10000 |
| Electrical life | 4000 | | 3000 | 3000 |



RPC Series

Feature:

- Overload & instantaneous protection
- Comply with IEC 60898-1 & IEC60947-2
- Window display for ON/OFF status
- Din-rail TH35mm tool free installation



RPV Series

Feature:

- Leakage protection
- Comply with IEC61008-1
- Window display for ON/OFF status and leakage indicator
- Leakage test bottom
- Din-rail TH35mm tool free installation



RPL Series

Feature:

- Overload, instantaneous & Leakage protection
- Comply with IEC 61009-1
- Window display for leakage indicator
- Leakage test bottom
- Din-rail TH35mm tool free installation

| MCB (CB Tép) Tiêu chuẩn IEC60898 Màu trắng (6kA) | | | | |
|--|----|----------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BHA | 1P | 6.10.16.20.25.32.40A | 6 | 87,000 |
| | | 50.63A | | 91,000 |
| BHA | 2P | 6.10.16.20.25.32.40A | | 185,000 |
| | | 50.63A | | 191,000 |
| BHA | 3P | 6.10.16.20.25.32.40A | | 299,000 |
| | | 50.63A | | 309,000 |
| BHA | 4P | 6.10.16.20.25.32.40A | | 483,000 |
| | | 50.63A | | 546,000 |

| MCB (CB Tép) Tiêu chuẩn IEC60898 Màu trắng (10kA) | | | | |
|---|----|----------------------|-----------|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BHA-B4 | 1P | 6.10.16.20.25.32.40A | 10 | 125,000 |
| | | 50.63A | | 150,000 |
| BHA125 | 1P | 80.100A | | 231,000 |
| | | 125A | | 312,000 |
| BHA-B4 | 2P | 6.10.16.20.25.32.40A | | 260,000 |
| | | 50.63A | | 318,000 |
| BHA125 | 2P | 80.100A | | 553,000 |
| | | 125A | | 566,000 |
| BHA-B4 | 3P | 6.10.16.20.25.32.40A | | 419,000 |
| | | 50.63A | | 572,000 |
| BHA125 | 3P | 80.100A | | 859,000 |
| | | 125A | | 878,000 |
| BHA-B4 | 4P | 6.10.16.20.25.32.40A | 686,000 | |
| | | 50.63A | 852,000 | |
| BHA125 | 4P | 80.100A | 1,124,000 | |
| | | 125A | 1,213,000 | |

| CB Chống giật (RCBO) Tiêu chuẩn IEC60947 30mA 0.1s | | | | |
|--|------|-------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BHL-A | 1P+N | 6.10.16.20A | 6 | 394,000 |
| | | 25.32A | | 419,000 |
| | | 40.50.63A | | 725,000 |
| BHL | 2P | 6.10.16.20A | | 712,000 |
| | | 25.32A | | 743,000 |
| | | 40.50.63A | | 758,000 |
| BHL | 3P | 6.10.16.20.25.32A | | 889,000 |
| | | 40.50.63A | | 1,067,000 |
| BHL | 4P | 6.10.16.20.25.32A | | 993,000 |
| | | 40.50.63A | | 1,213,000 |

| CB Chống giật (RCCB) Tiêu chuẩn IEC60947 30mA 0.1s | | | |
|--|----|-------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| BHR-A | 2P | 25.32.40A | 712,000 |
| | | 63A | 725,000 |
| BHR-A | 4P | 25.32.40A | 889,000 |
| | | 63A | 988,000 |

| CB Chống giật (RCCB) Tiêu chuẩn CNS 14816-2 30mA 0.1s | | | | |
|---|----|-------------------|-----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BL-KF | 2P | 15.20.30A | 1.5 | 486,000 |
| BL-K30F | 3P | | | 765,000 |
| NV-BF | 2P | 15.20.30A | 1.5 | 386,000 |

| BL-BF | | | |
|----------------|----|-------------------|---------------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) |
| BL-BF C (MCB) | | | 89,000 |
| BL-BF V (RCCB) | 2P | 15.20.30A | 219,000 |
| BL-BF L (RCBO) | | | 323,000 |

| CB Chống giật (RCBO) Tiêu chuẩn CNS 14816-2 30mA 0.1s | | | | |
|---|----|-------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| NVB-50L | 2P | | 5 | 744,000 |
| NVB-50UL | 1P | 15.20.30.40.50A | | 610,000 |
| NVB-50UL | 2P | | 10 | 1,015,000 |

| SMC (Automatic) | | | | |
|-----------------|----|-------------------|---------------|---------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) | |
| SMC | 2P | 16A | 215,000 | |
| | | 25A | | |
| | | 40A | | |
| | 4P | 63A | | 462,000 |
| | | 16A | | 396,000 |
| | | 25A | | 635,000 |

| SMC (Manual) | | | | |
|--------------|----|-------------------|---------------|---------|
| Mã hàng | P | Dòng định mức (A) | Đơn giá (VND) | |
| SMC | 2P | 16A | 292,000 | |
| | | 25A | | |
| | | 40A | | |
| | 4P | 63A | | 595,000 |
| | | 16A | | 518,000 |
| | | 25A | | 801,000 |

| MCB (CB Tép) Tiêu chuẩn CNS14816-2 Màu đen | | | | |
|--|----|-------------------|----|---------------|
| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
| BP | 1P | 15.20.30.40.50A | 5 | 120,000 |
| | | 60.75.100A | | 221,000 |
| BP | 2P | 15.20.30.40.50A | | 250,000 |
| | | 60.75.100A | | 431,000 |
| BP | 3P | 15.20.30.40.50A | | 422,000 |
| BPH | 1P | 60.75.100A | | 759,000 |
| | | 15.20.30.40.50A | | 184,000 |
| BPH | 2P | 15.20.30.40.50A | | 315,000 |
| | | 60.75.100A | | 551,000 |
| BPH | 3P | 15.20.30.40.50A | | 614,000 |
| | | 60.75.100A | | 1,107,000 |



Closing coil unit



Closing Coil

| | |
|-------|---------|
| CMD01 | AC 380V |
| CMD02 | AC 220V |
| CMD03 | DC 220V |
| CMD04 | DC 110V |
| CMD05 | AC 110V |

Shunt release unit



Shunt Trip

| | |
|-------|---------|
| SHT01 | AC 380V |
| SHT02 | AC 220V |
| SHT03 | DC 220V |
| SHT04 | DC 110V |
| SHT05 | AC 110V |

Under voltage trip unit



Under Voltage Trip

| | |
|-------|-----------------------|
| UVT01 | Instantaneous AC 380V |
| UVT02 | Delay AC 380V |
| UVT03 | Instantaneous AC 220V |
| UVT04 | Delay AC 220V |
| UVT05 | Instantaneous AC 110V |
| UVT06 | Delay AC 110V |


Locking device



Locks

| | |
|-------|-----------------|
| LOK01 | 3 Locks, 2 Keys |
| LOK03 | Button Lock |
| LOK04 | Racking Lock |
| LOK05 | Key Lock |
| LOK07 | 2 Locks, 1 Key |

Mechanical interlock device

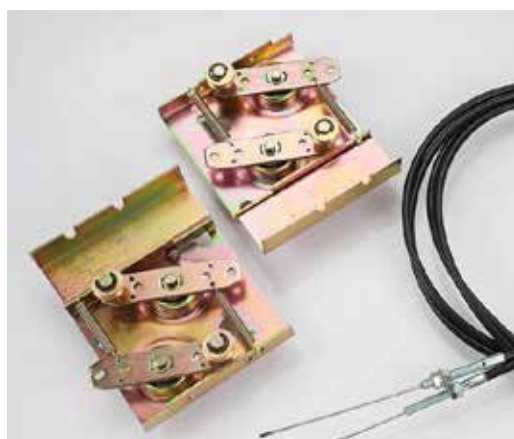

Mechanical Interlock

| | |
|-------|---------------------------------------|
| MIL01 | Drawout, Vertical, For 2 |
| MIL02 | Drawout, Horizontal, For 2, W/O cable |
| MIL03 | Fixed, Vertical, For 2 |
| MIL04 | Fixed, Horizontal, For 2, W/O cable |
| MIL05 | Drawout, Vertical, For 3 |
| MIL06 | Fixed, Vertical, For 3 |
| MIL07 | Drawout, Horizontal, Ø2.5mm*1.5m |
| MIL08 | Fixed, Horizontal, Ø2.5mm*1.5m |
| MIL09 | Drawout, Horizontal, For 3 |

Giá bán đã bao gồm thuế VAT 10%

ACB 3P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|----|---------------|
| BW 1600-SN | 3P | 630A | 65 | 39,300,000 |
| | | 800A | | 39,300,000 |
| | | 1000A | | 41,000,000 |
| | | 1250A | | 41,900,000 |
| | | 1600A | | 46,200,000 |

ACB 3P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|----|---------------|
| BW 1600-SN | 3P | 630A | 65 | 53,200,000 |
| | | 800A | | 53,200,000 |
| | | 1000A | | 54,200,000 |
| | | 1250A | | 56,100,000 |
| | | 1600A | | 61,000,000 |

ACB 3P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|-----|---------------|
| BW 2000-HN | 3P | 630A | 85 | 47,840,000 |
| | | 800A | | 47,840,000 |
| | | 1000A | | 49,900,000 |
| | | 1250A | | 51,000,000 |
| | | 1600A | | 56,200,000 |
| BW 3200-HN | 3P | 2000A | 100 | 63,400,000 |
| | | 2500A | | 73,700,000 |
| | | 3200A | | 89,100,000 |

ACB 3P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|---------|---------------|
| BW 2000-HN | 3P | 630A | 85 | 57,200,000 |
| | | 800A | | 57,200,000 |
| | | 1000A | | 58,200,000 |
| | | 1250A | | 60,300,000 |
| | | 1600A | | 65,500,000 |
| BWA 2500 | 3P | 2000A | 100 | 70,600,000 |
| | | 2500A | | 85,300,000 |
| BW 3200-HN | 3P | 2500A | 100 | 91,300,000 |
| | | 3200A | | 106,700,000 |
| BW 4000-HN | 3P | 4000A | 120/100 | 187,000,000 |
| | | 5000A | | 258,500,000 |
| BW 6300-HS | 3P | 6300A | 120/100 | 286,000,000 |

Phụ kiện ACB

| Mã hàng | Đơn giá (VND) |
|---------------------------------------|---------------|
| UVT Bộ bảo vệ thấp áp delay 5 sec | 9,350,000 |
| Khóa liên động 2-way (Dùng cho 2 ACB) | 21,450,000 |
| Khóa liên động 3-way (Dùng cho 3 ACB) | 33,000,000 |
| Bảng điều khiển dùng cho ATS | 15,000,000 |

ACB 4P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|----|---------------|
| BW 1600-SN | 4P | 630A | 65 | 43,600,000 |
| | | 800A | | 43,600,000 |
| | | 1000A | | 45,300,000 |
| | | 1250A | | 46,200,000 |
| | | 1600A | | 51,300,000 |

ACB 4P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|----|---------------|
| BW 1600-SN | 4P | 630A | 65 | 58,100,000 |
| | | 800A | | 58,100,000 |
| | | 1000A | | 60,000,000 |
| | | 1250A | | 61,900,000 |
| | | 1600A | | 68,700,000 |

ACB 4P FIXED Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|-----|---------------|
| BW 2000-HN | 4P | 630A | 85 | 53,040,000 |
| | | 800A | | 53,040,000 |
| | | 1000A | | 55,100,000 |
| | | 1250A | | 56,200,000 |
| | | 1600A | | 62,400,000 |
| BW 3200-HN | 4P | 2000A | 100 | 70,400,000 |
| | | 2500A | | 81,400,000 |
| | | 3200A | | 97,900,000 |

ACB 4P DRAW OUT Bao gồm: MD, CC, SHT, AX5C (Ics= 100% Icu)

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|------------|----|-------------------|---------|---------------|
| BW 2000-HN | 4P | 630A | 85 | 62,400,000 |
| | | 800A | | 62,400,000 |
| | | 1000A | | 64,500,000 |
| | | 1250A | | 66,600,000 |
| | | 1600A | | 73,800,000 |
| BWA 2500 | 4P | 2000A | 100 | 83,600,000 |
| | | 2500A | | 100,100,000 |
| BW 3200-HN | 4P | 2500A | 100 | 101,200,000 |
| | | 3200A | | 117,700,000 |
| BW 4000-HN | 4P | 4000A | 120/100 | 231,000,000 |
| BW 6300-HS | 4P | 5000A | 120/100 | 330,000,000 |



Giá bán đã bao gồm thuế VAT 10%

ATS / SPD

ATS Loại MCCB Tiêu chuẩn IEC60947-2 – Giá đã bao gồm bảng điều khiển

| Mã hàng | P | Dòng định mức (A) | kA | Đơn giá (VND) |
|----------|----|-------------------|-----|---------------|
| BS100SN | 3P | 100A | 15 | 15,138,000 |
| BS100HN | 3P | 100A | 30 | 18,729,000 |
| BS250SN | 3P | 250A | 30 | 21,546,000 |
| BS400SN | 3P | 250.300.350.400A | 35 | 37,318,000 |
| BS400HN | 3P | 250.300.350.400A | 50 | 37,458,000 |
| BS630SN | 3P | 500.600.630A | 35 | 55,976,000 |
| BS630HN | 3P | 500.600.630A | 50 | 65,129,000 |
| BS800SN | 3P | 700.800A | 50 | 71,184,000 |
| BS1000HS | 3P | 1000A | 100 | 160,182,000 |
| BS1200HS | 3P | 1200A | 100 | 182,009,000 |
| BS1600HS | 3P | 1400.1600A | 100 | 217,919,000 |

PC grade ATS 3P

| Mã hàng | Dòng định mức (A) | Đơn giá (VND) |
|-----------|-------------------|---------------|
| XSTN-63 | 20A/40A/63A | 9,131,000 |
| | 80A | |
| XSTN-125 | 100A | 10,338,000 |
| | 125A | |
| XSTN-250 | 160A/ 200A/ 250A | 11,900,000 |
| XSTN-500 | 350A/ 450A/ 500A | 28,000,000 |
| | 630A | 35,500,000 |
| XSTN-800 | 800A | 44,000,000 |
| XSTN-1250 | 1000/1250A | 57,000,000 |
| | 1600A | 72,000,000 |
| XSTN-2500 | 2000A | 88,000,000 |
| | 2500A | 137,000,000 |
| | 3200A | 310,000,000 |
| XSTN-5000 | 4000A | 330,000,000 |
| | 5000A | 380,000,000 |

PC grade ATS 4P

| Mã hàng | Dòng định mức (A) | Đơn giá (VND) |
|-----------|-------------------|---------------|
| XSTN-63 | 20A/40A/63A | 12,000,000 |
| | 80A | |
| XSTN-125 | 100A | 13,100,000 |
| | 125A | |
| XSTN-250 | 160A/ 200A/ 250A | 14,000,000 |
| XSTN-500 | 350A/ 450A/ 500A | 31,000,000 |
| | 630A | 39,000,000 |
| XSTN-800 | 800A | 46,000,000 |
| XSTN-1250 | 1000/1250A | 69,000,000 |
| | 1600A | 79,000,000 |
| XSTN-2500 | 2000A | 109,000,000 |
| | 2500A | 145,000,000 |
| | 3200A | 340,000,000 |
| XSTN-5000 | 4000A | 380,000,000 |
| | 5000A | 470,000,000 |

PC grade ATS controller

| Mã hàng | Đơn giá (VND) |
|------------------|---------------|
| XST-5 (Standard) | 4,000,000 |
| XST-6 (LCD) | 5,200,000 |

Chống sét lan truyền

| Mã hàng | I _{max} (kA) | μs | Đơn giá (VND) | | | | | |
|--------------------------|-----------------------|--------|---------------|------------|------------|------------|------------|------------|
| | | | 1P | 2P(1P+N) | 3P | 4P(3P+N) | 1P+PE | 3P+PE |
| BHP-20 | 20 | 8/20 | 1,597,000 | 3,340,000 | 4,840,000 | 6,534,000 | 4,054,000 | 7,260,000 |
| BHP-40 | 40 | | 2,372,000 | 4,792,000 | 7,115,000 | 9,559,000 | 5,566,000 | 10,321,000 |
| BHP-80 | 80 | | 2,795,000 | 5,590,000 | 8,276,000 | 11,132,000 | 6,353,000 | 11,919,000 |
| BHP-100 | 100 | | 7,502,000 | 15,488,000 | 22,990,000 | 30,855,000 | 16,214,000 | 31,460,000 |
| BHP-250 | 250 | 10/350 | 10,527,000 | 17,303,000 | 26,499,000 | 32,912,000 | 19,481,000 | 35,211,000 |
| Counter-Bộ đếm TAD-04-99 | | | 4,356,000 | | | | | |


Đồng hồ đa năng: IEC 62052-22 (Loại tiêu chuẩn)

| Mã hàng | Đơn giá (VND) |
|---------|---------------|
| DM40-SV | 4,320,000 |

Đồng hồ đa năng: IEC 62052-22 (Loại giao tiếp)

| Mã hàng | Đơn giá (VND) |
|----------------------------|---------------|
| DM40-HV | 5,040,000 |
| DM40-HV RS485 module | 1,080,000 |
| DM40-HV Lora module | 1,440,000 |
| DM40-HV Analog I/O module | 1,080,000 |
| DM40-HV Digital I/O module | 720,000 |



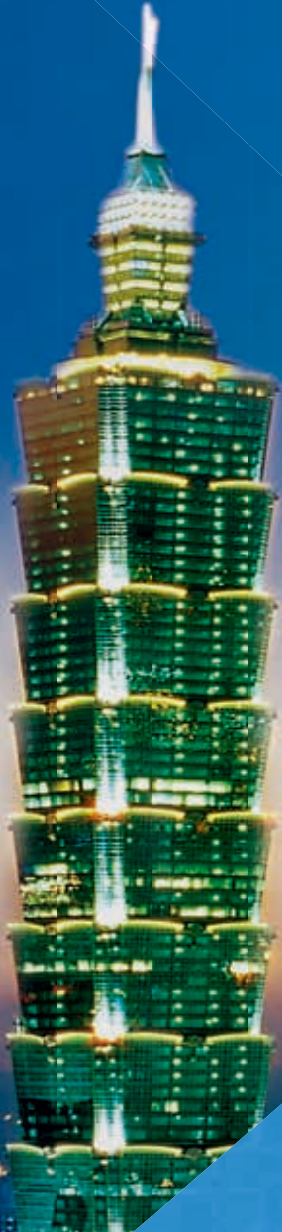

No.1  Taiwan

ELECTRIC COMPANY in TAIWAN

Shihlin Electric Light Up Taipei 101,
One Of World Tallest Buildings

POWER
TO THE
WORLD



Air Circuit Breaker




3 MCCB
Bảo Hành
Năm

Molded Case
Circuit Breaker



3 MCB
Bảo Hành
Năm

Miniature
Circuit Breaker

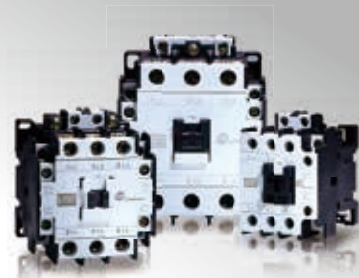

Magnetic
Contactor / Starter





KIM QUANG ELECTRIC DISTRIBUTOR

www.kimquang.com.vn

www.kimquang.vn

Hotline: 0931 455 668

Headquarters

16F, No.88, Sec. 6, Zhongshan N. Rd., Shilin Dist.,

Taipei City 11155, Taiwan

T. +886-2-2834-2662

F. +886-2-2836-6187

<http://www.seec.com.tw>

Breaker & switchgears overseas sales dept.

3F, No.9, Sec. 1, Chang-an E. Rd., Zhongshan Dist.,

Taipei City 10441, Taiwan

T. +886-2-2541-9822

F. +886-2-2581-2665

e-mail. b.export@seec.com.tw

<http://circuit-breaker.seec.com.tw>